





# M-140 1500 Three Phase

## STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

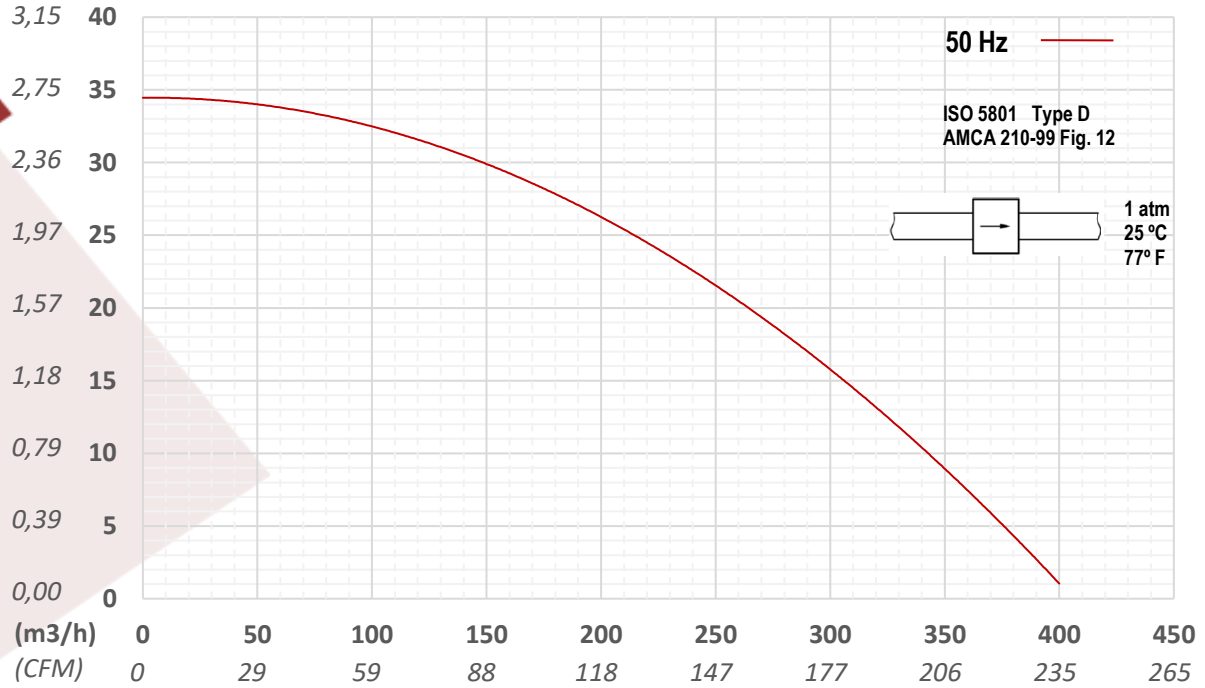

## FLOW RATE

### CONFIGURATION DATA

3-Phase  
50 Hz

Max. Flow Rate	m <sup>3</sup> /h	544
Max. Static Pressure	mmca	52
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PPs-EL
Noise pressure (1,5m)	dB(A)	59
Weight	Kg	8

### MOTOR

3-Phase  
50 Hz

Frame Size		56
Mountings		B3
Speed	rpm	2800
Power	kW	0,09
Weight	Kg	2,8
Voltage	V	230-400
Safety Class		IP55

### Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	31	35	38	47	49	46	45	37	51
	B	31	33	37	47	48	44	41	34	50
	C	29	35	39	44	48	41	39	33	49
DISCHARGE	A	21	32	41	47	49	47	46	37	51
	B	21	32	41	47	46	44	42	32	49
	C	23	34	42	44	44	41	38	32	47

### Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	135	270	240	200	400	495	250	230	210	125	155	320
inch	5,3	10,6	9,4	7,9	15,7	19,5	9,8	9	8,3	4,9	6,1	12,6