
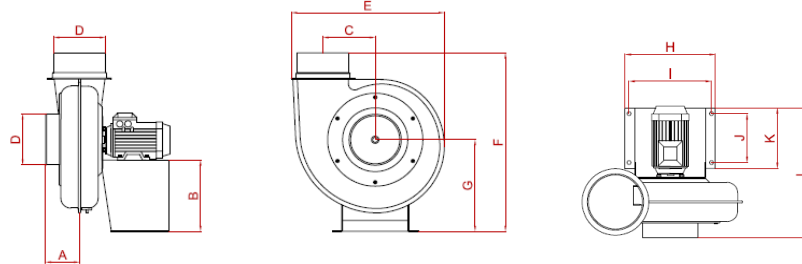


M-140 3000 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

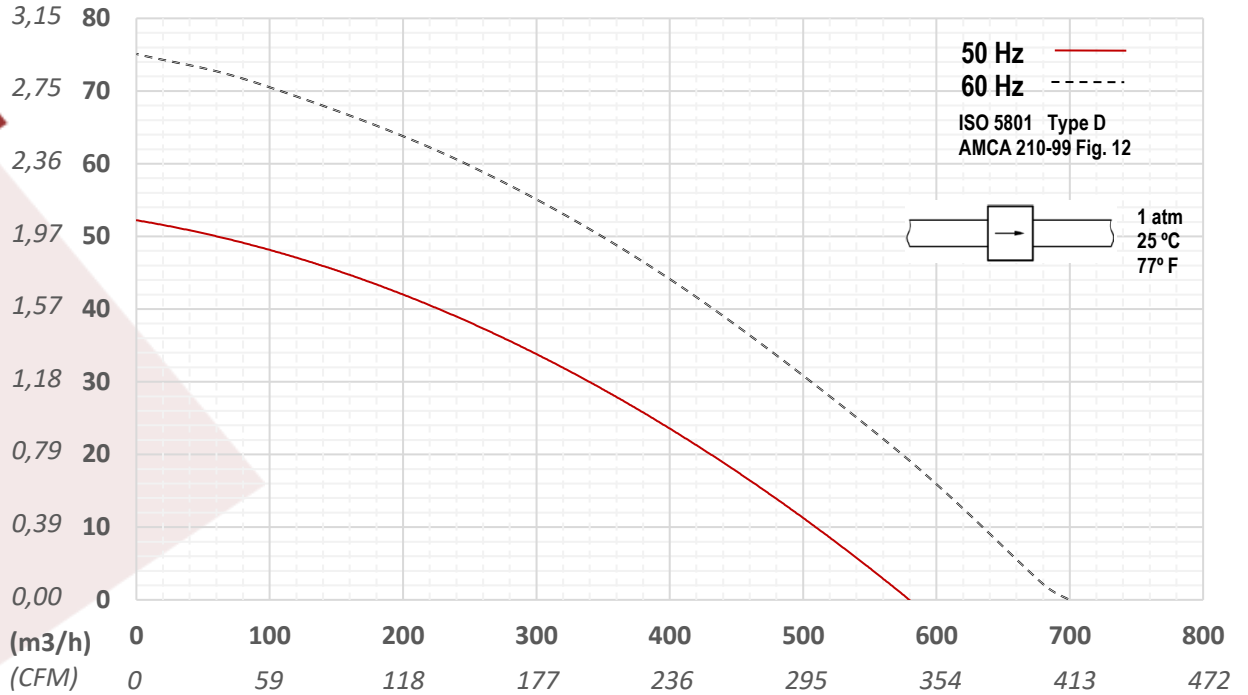

FLOW RATE

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m ³ /h	544
Max. Static Pressure	mmca	52
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PPs-EL
Noise pressure (1,5m)	dB(A)	59
Weight	Kg	8

MOTOR

3-Phase
50 Hz

Frame Size		56
Mountings		B3
Speed	rpm	2800
Power	kW	0,09
Weight	Kg	2,8
Voltage	V	230-400
Safety Class		IP55

Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	46	52	57	71	74	69	67	55	77
	B	46	50	56	70	72	66	61	51	75
	C	44	53	59	66	72	62	58	50	74
DISCHARGE	A	31	48	61	71	73	71	69	56	77
	B	32	48	61	70	69	66	63	48	74
	C	35	51	63	66	66	61	57	48	71

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	90	195	150	140	400	495	250	230	210	125	155	320
inch	3,5	7,7	5,9	5,5	15,7	19,5	9,8	9	8,3	4,9	6,1	12,6

