
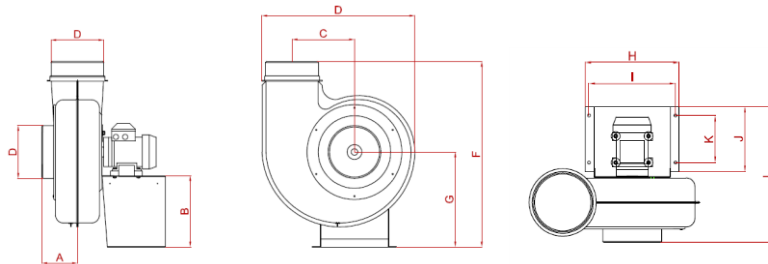



M-200 1000 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

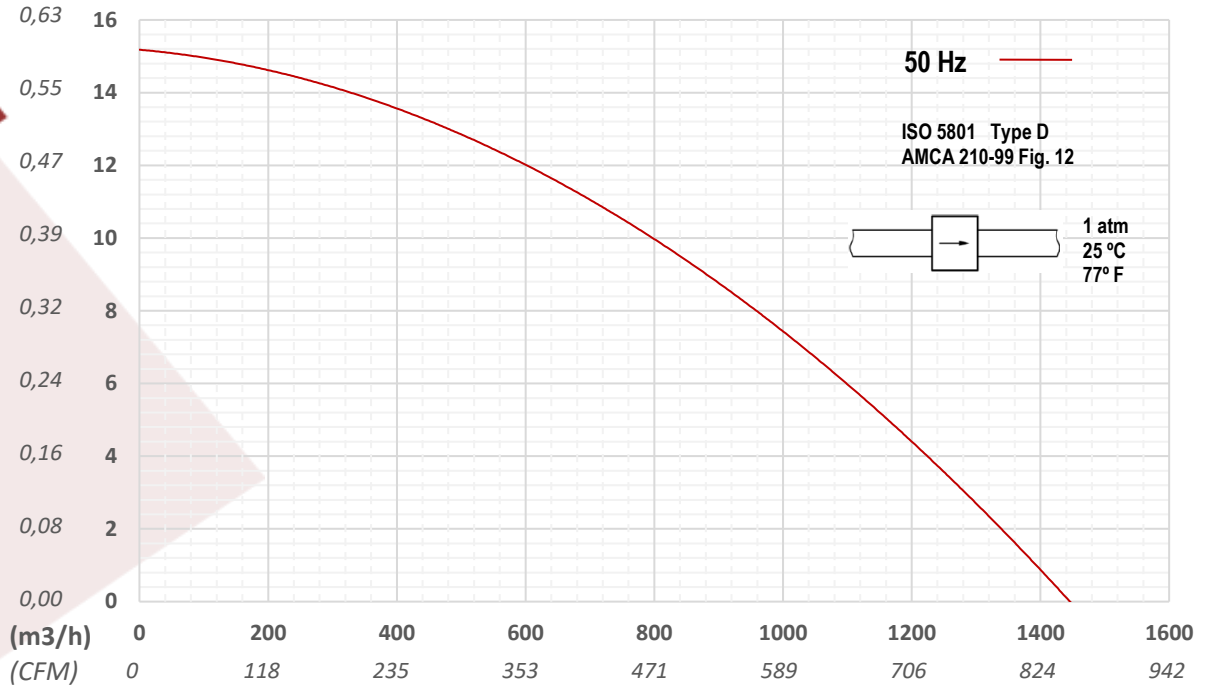

FLOW RATE

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m ³ /h	1500
Max. Static Pressure	mmca	15
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PPs-EL
Noise pressure (1,5m)	dB(A)	71
Weight	Kg	15

MOTOR

3-Phase
50 Hz

Frame Size		71
Mountings		B3
Speed	rpm	950
Power	kW	0,25
Weight	Kg	6
Voltage	V	230-400
Safety Class		IP55

Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	35	39	45	51	56	51	48	44	57
	B	35	40	46	50	54	50	46	42	55
DISCHARGE	A	33	39	49	52	54	52	49	43	57
	B	35	40	48	50	51	50	47	42	55

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	135	270	240	200	570	695	360	320	295	160	220	480
inch	5,3	10,6	9,4	7,9	22,4	27,3	14,1	13	11,6	6,3	8,6	18,9