
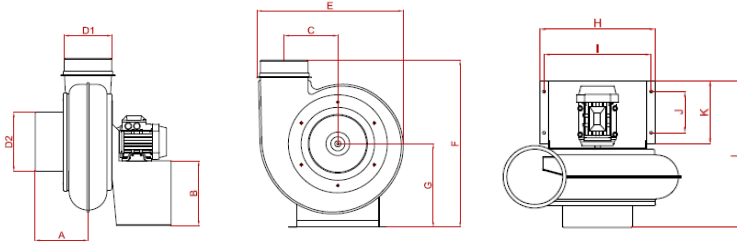



M-200VG 1500 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

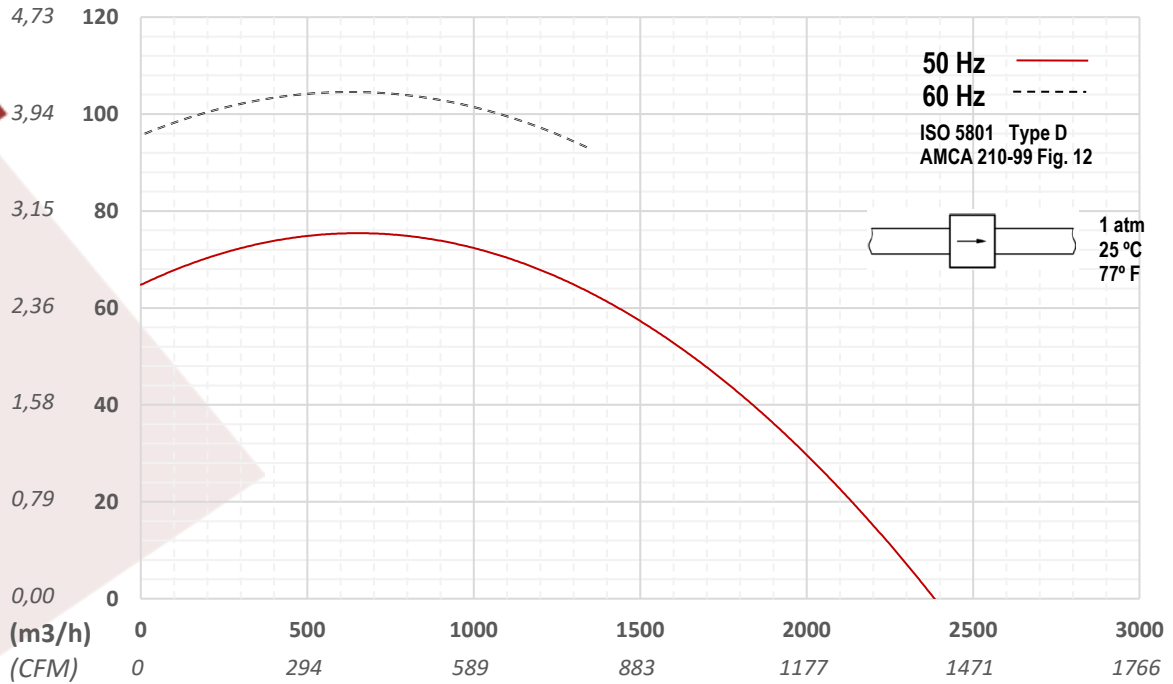

FLOW RATE

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m ³ /h	2400
Max. Static Pressure	mmca	79
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PPs-EL
Noise pressure (1,5m)	dB(A)	77
Weight	Kg	21

MOTOR

3-Phase
50 Hz

Frame Size		80
Mountings		B3
Speed	rpm	1400
Power	kW	0,55
Weight	Kg	9,3
Voltage	V	230-400
Safety Class		IP55

Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	24	48	61	65	64	63	60	53	74
	B	14	30	49	59	61	61	56	42	68
DISCHARGE	A	20	45	61	67	69	70	65	49	77
	B	13	27	47	57	61	60	59	35	67