





# M-250 1500 Three Phase

## STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

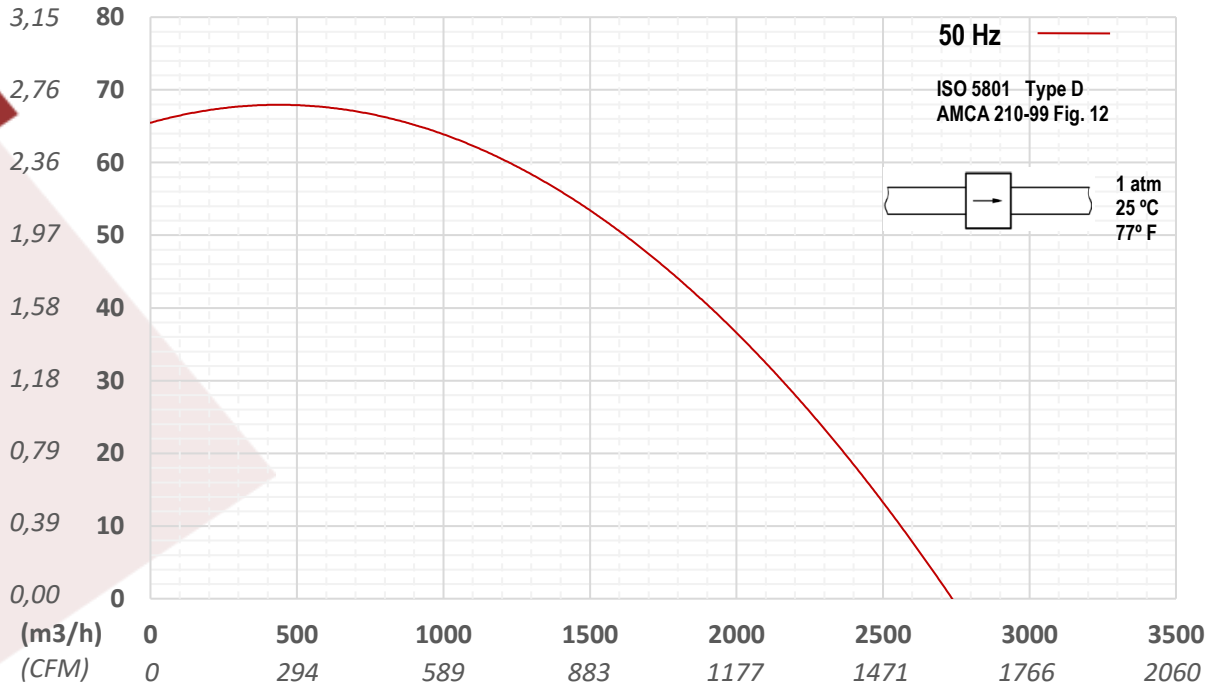

FLOW RATE



### CONFIGURATION DATA

3-Phase  
50 Hz

Max. Flow Rate	m <sup>3</sup> /h	2800
Max. Static Pressure	mmca	66
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PP
Noise pressure (1,5m)	dB(A)	78
Weight	Kg	38

### MOTOR

3-Phase  
50 Hz

Frame Size		90
Mountings		B3
Speed	rpm	1400
Power	kW	1,5
Weight	Kg	18
Voltage	V	230-400
Safety Class		IP55

### Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	51	60	70	77	81	75	70	64	84
	B	48	58	68	74	78	72	67	61	81
	C	53	59	59	70	75	69	63	56	78
DISCHARGE	A	66	74	81	81	81	77	72	65	87
	B	58	66	76	74	74	74	68	61	82
	C	53	60	68	71	68	70	64	56	78

### Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	202	375	302	250	400	893	465	516	486	200	280	635
inch	7,9	14,7	11,9	9,8	15,7	35,1	18,3	20	19,1	7,9	11	25