





M-315 1000 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

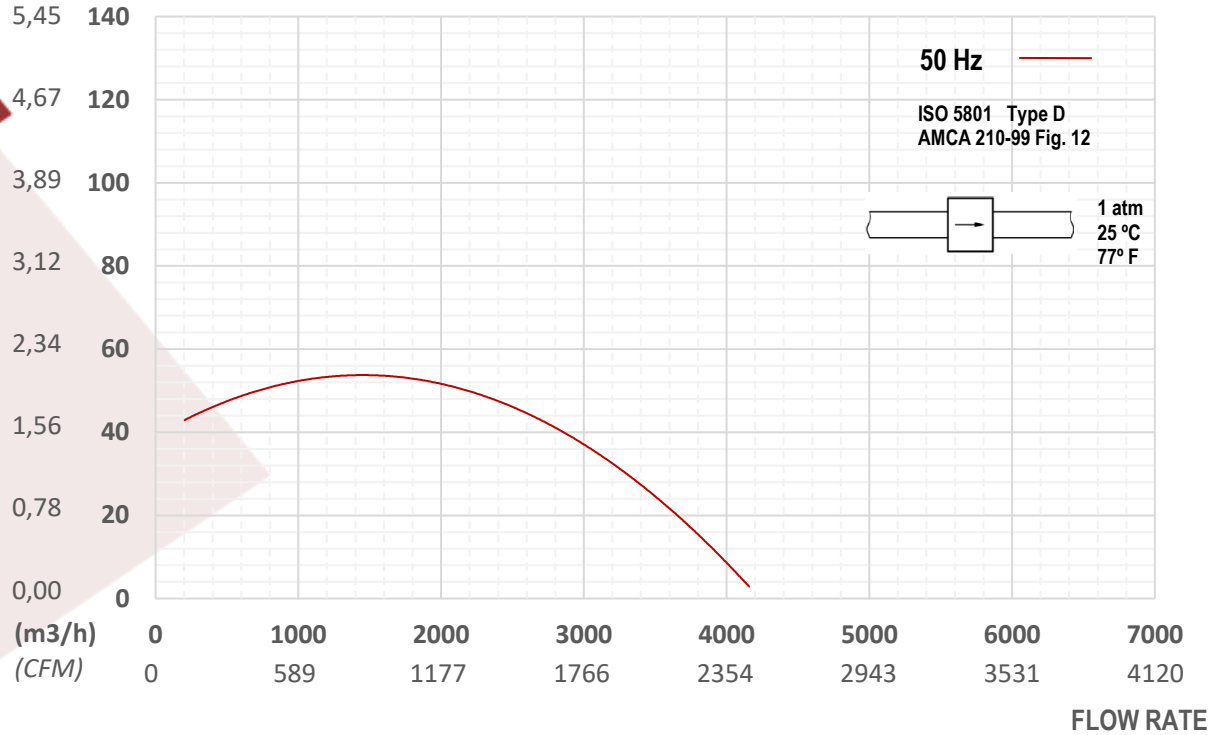

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m3/h	4157
Max. Static Pressure	mmca	50
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PP-H
Noise pressure (1,5m)	dB(A)	70
Weight	Kg	35

MOTOR

3-Phase
50 Hz

Frame Size		100
Mountings		B3
Speed	rpm	950
Power	kW	1,5
Weight	Kg	22,1
Voltage	V	230-400
Safety Class		IP55

Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	51	57	65	69	71	65	60	55	74
	B	60	62	64	67	71	65	59	53	73
DISCHARGE	A	63	68	73	72	73	68	61	55	78
	B	58	62	66	67	69	65	56	51	73

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	90	195	150	140	400	495	250	230	210	125	155	320
inch	3,5	7,7	5,9	5,5	15,7	19,5	9,8	9	8,3	4,9	6,1	12,6