





M-315 3000 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

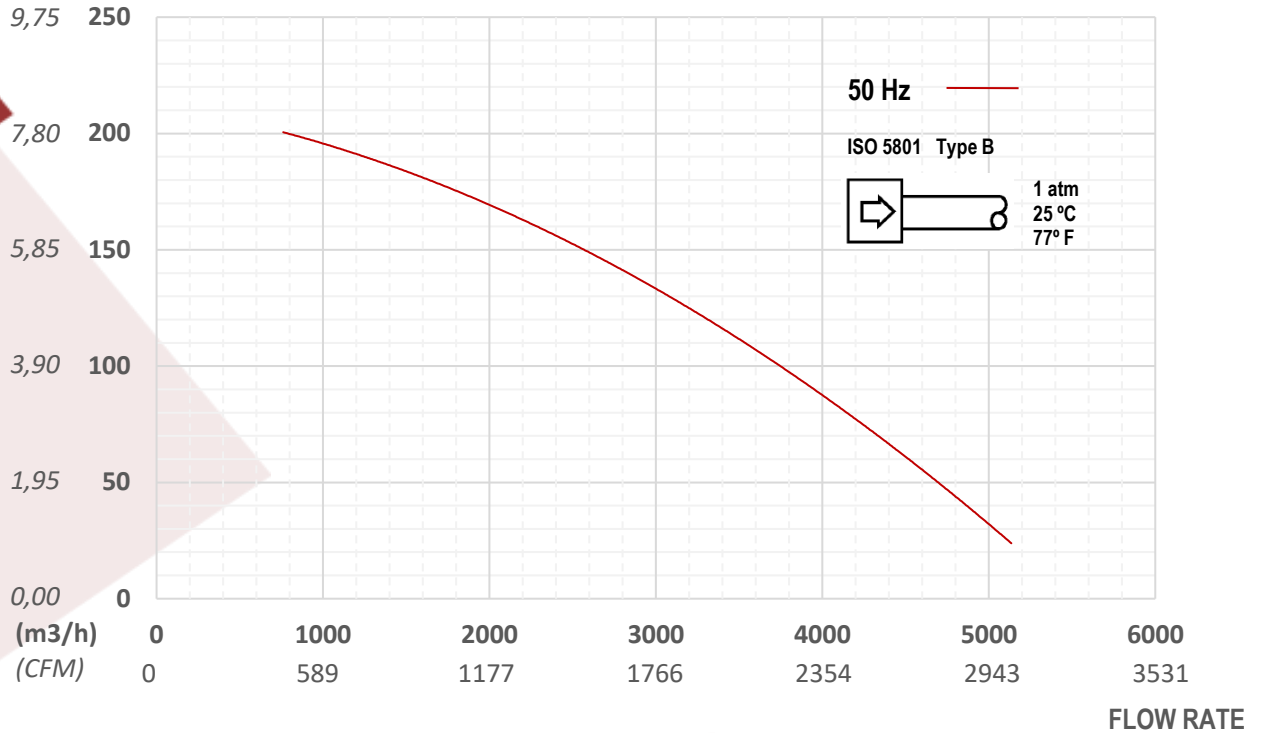

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m ³ /h	5135
Max. Static Pressure	mmca	201
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PP-H
Noise pressure (1,5m)	dB(A)	94
Weight	Kg	60

MOTOR

3-Phase
50 Hz

Frame Size		100
Mountings		B3
Speed	rpm	2800
Power	kW	3
Weight	Kg	23,7
Voltage	V	230-400
Safety Class		IP55

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	90	195	150	140	400	495	250	230	210	125	155	320
inch	3,5	7,7	5,9	5,5	15,7	19,5	9,8	9	8,3	4,9	6,1	12,6