





M-160 3000 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

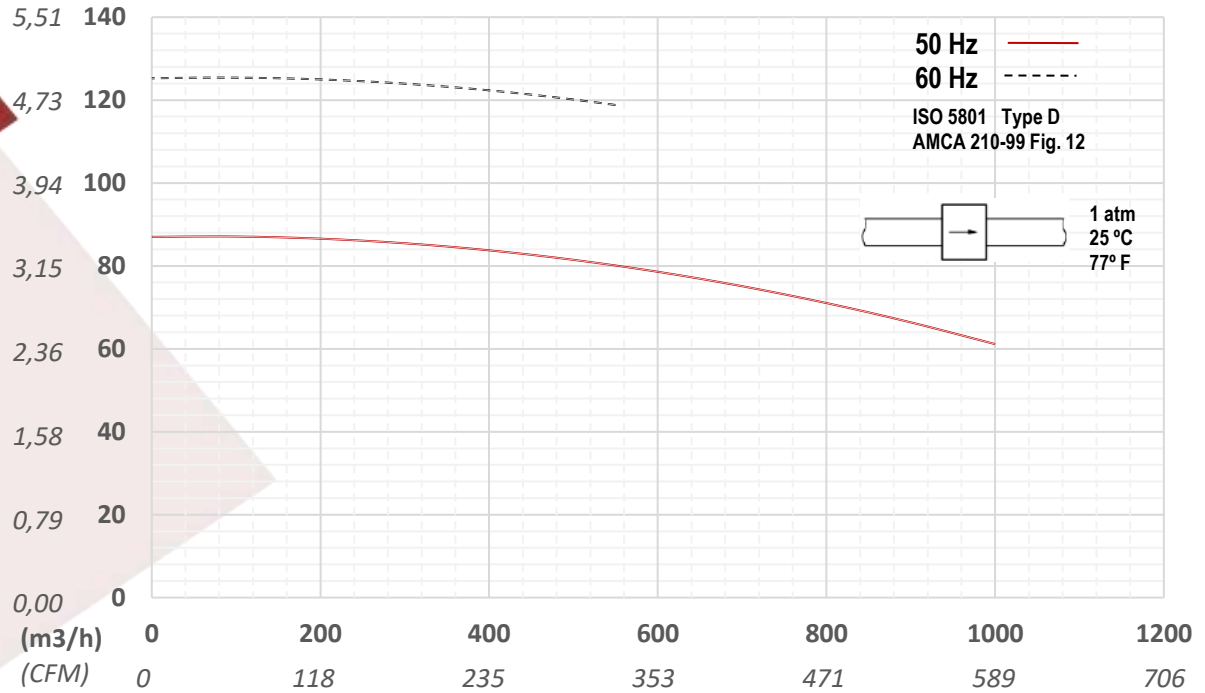

FLOW RATE

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m ³ /h	1000
Max. Static Pressure	mmca	87
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PPs-EL
Noise pressure (1,5m)	dB(A)	68
Weight	Kg	16

MOTOR

3-Phase
50 Hz

Frame Size		71
Mountings		B3
Speed	rpm	2800
Power	kW	0,37
Weight	Kg	5,2
Voltage	V	230-400
Safety Class		IP55

Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	53	59	68	77	84	77	72	66	86
	B	52	60	69	75	81	75	69	63	83
DISCHARGE	A	50	59	73	78	81	78	74	65	85
	B	52	60	72	75	77	75	70	63	82

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	90	195	150	160	400	495	250	230	210	125	155	320
inch	3,5	7,7	5,9	6,3	15,7	19,5	9,8	9	8,3	4,9	6,1	12,6