





M-315 1500 Three Phase

STATIC PRESSURE

(inch.c.w.) (mm.c.a.)

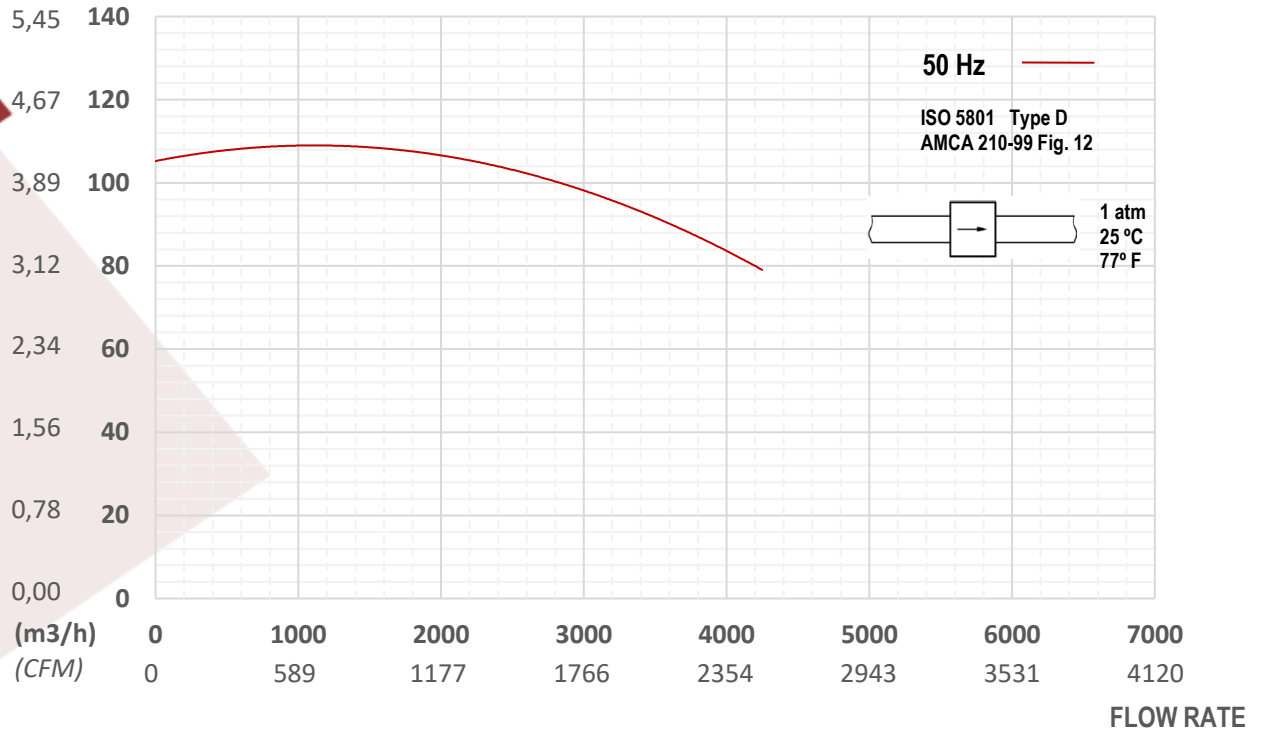

CONFIGURATION DATA

3-Phase
50 Hz

Max. Flow Rate	m3/h	4250
Max. Static Pressure	mmca	112
Drive Type		DOL
Casing Material		PP-H
Impeller Material		PP-H
Noise pressure (1,5m)	dB(A)	88
Weight	Kg	56

MOTOR

3-Phase
50 Hz

Frame Size		100
Mountings		B3
Speed	rpm	1400
Power	kW	2,2
Weight	Kg	23,9
Voltage	V	230-400
Safety Class		IP55

Octave Band Sound Power Level dB(A)

		63	125	250	500	1000	2000	4000	8000	LWA
ASPIRATION	A	61	68	78	83	85	78	72	66	89
	B	72	74	77	80	85	78	71	63	88
DISCHARGE	A	75	82	87	86	88	82	73	66	93
	B	70	74	79	80	83	78	67	61	87

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L
mm	257	490	390	315	970	1069	590	420	390	305	365	765
inch	10,1	19,3	15,3	12,4	38,1	42	23,2	17	15,3	12,0	14,3	30,1